


■ 构造图 Construction

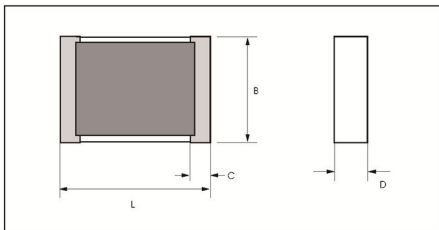

■ 产品特点 Features

- 薄膜技术
- 端头镀锡——防析出
- 膜层钝化树脂保护
- 高精度(0.05%)—低温度系数(5ppm/K)
- 低噪声
- Thin film technology
- Contact areas tinned—resistant to leaching
- Resistance element resin—passivated
- Close tolerances(0.05%)—low TCR(5ppm/K)
- Extreme low noise

■ 应用范围 Applications

- 电脑
- 移动通信
- 仪器仪表
- 各类电子设备
- Computers
- Telecom and wireless
- Meters and instruments
- Electrical devices

■ 执行标准 Reference Standards

Q/ATK059

■ 技术说明 Technical Specifications

型号 Type	额定功率 P_{70} (mW) Power rating P_{70} (mW)	工作电压(V) Working voltage(V)
0603	65	75
0805	125	100
1206	250	200
2512	750	300 ¹⁾

■ 外形尺寸 Dimensions(mm)

型号 Type	L	B	D	C
0603	1.6 ^{+0.1}	0.8 ^{+0.1}	0.45 ^{+0.1}	0.3 ^{+0.2}
0805	2.0 ^{+0.1}	1.25 ^{+0.1}	0.55 ^{+0.1}	0.4 ^{+0.2}
1206	3.2 ^{+0.2}	1.6 ^{+0.15}	0.55 ^{+0.1}	0.5 ^{+0.2}
2512	6.3 ^{+0.2}	3.2 ^{+0.2}	0.55 ^{+0.2}	0.5 ^{+0.2}

L=长度, B=宽度, D=厚度, C=包围电极宽度(mm)

L=Length, B=Width, D=Thickness,

C=Width of wraparound (in mm)

■ 降功耗曲线 Derating Curve

