


CMP系列 精密模压片式电阻器 Series CMP

High Stability Metal Film Resistors

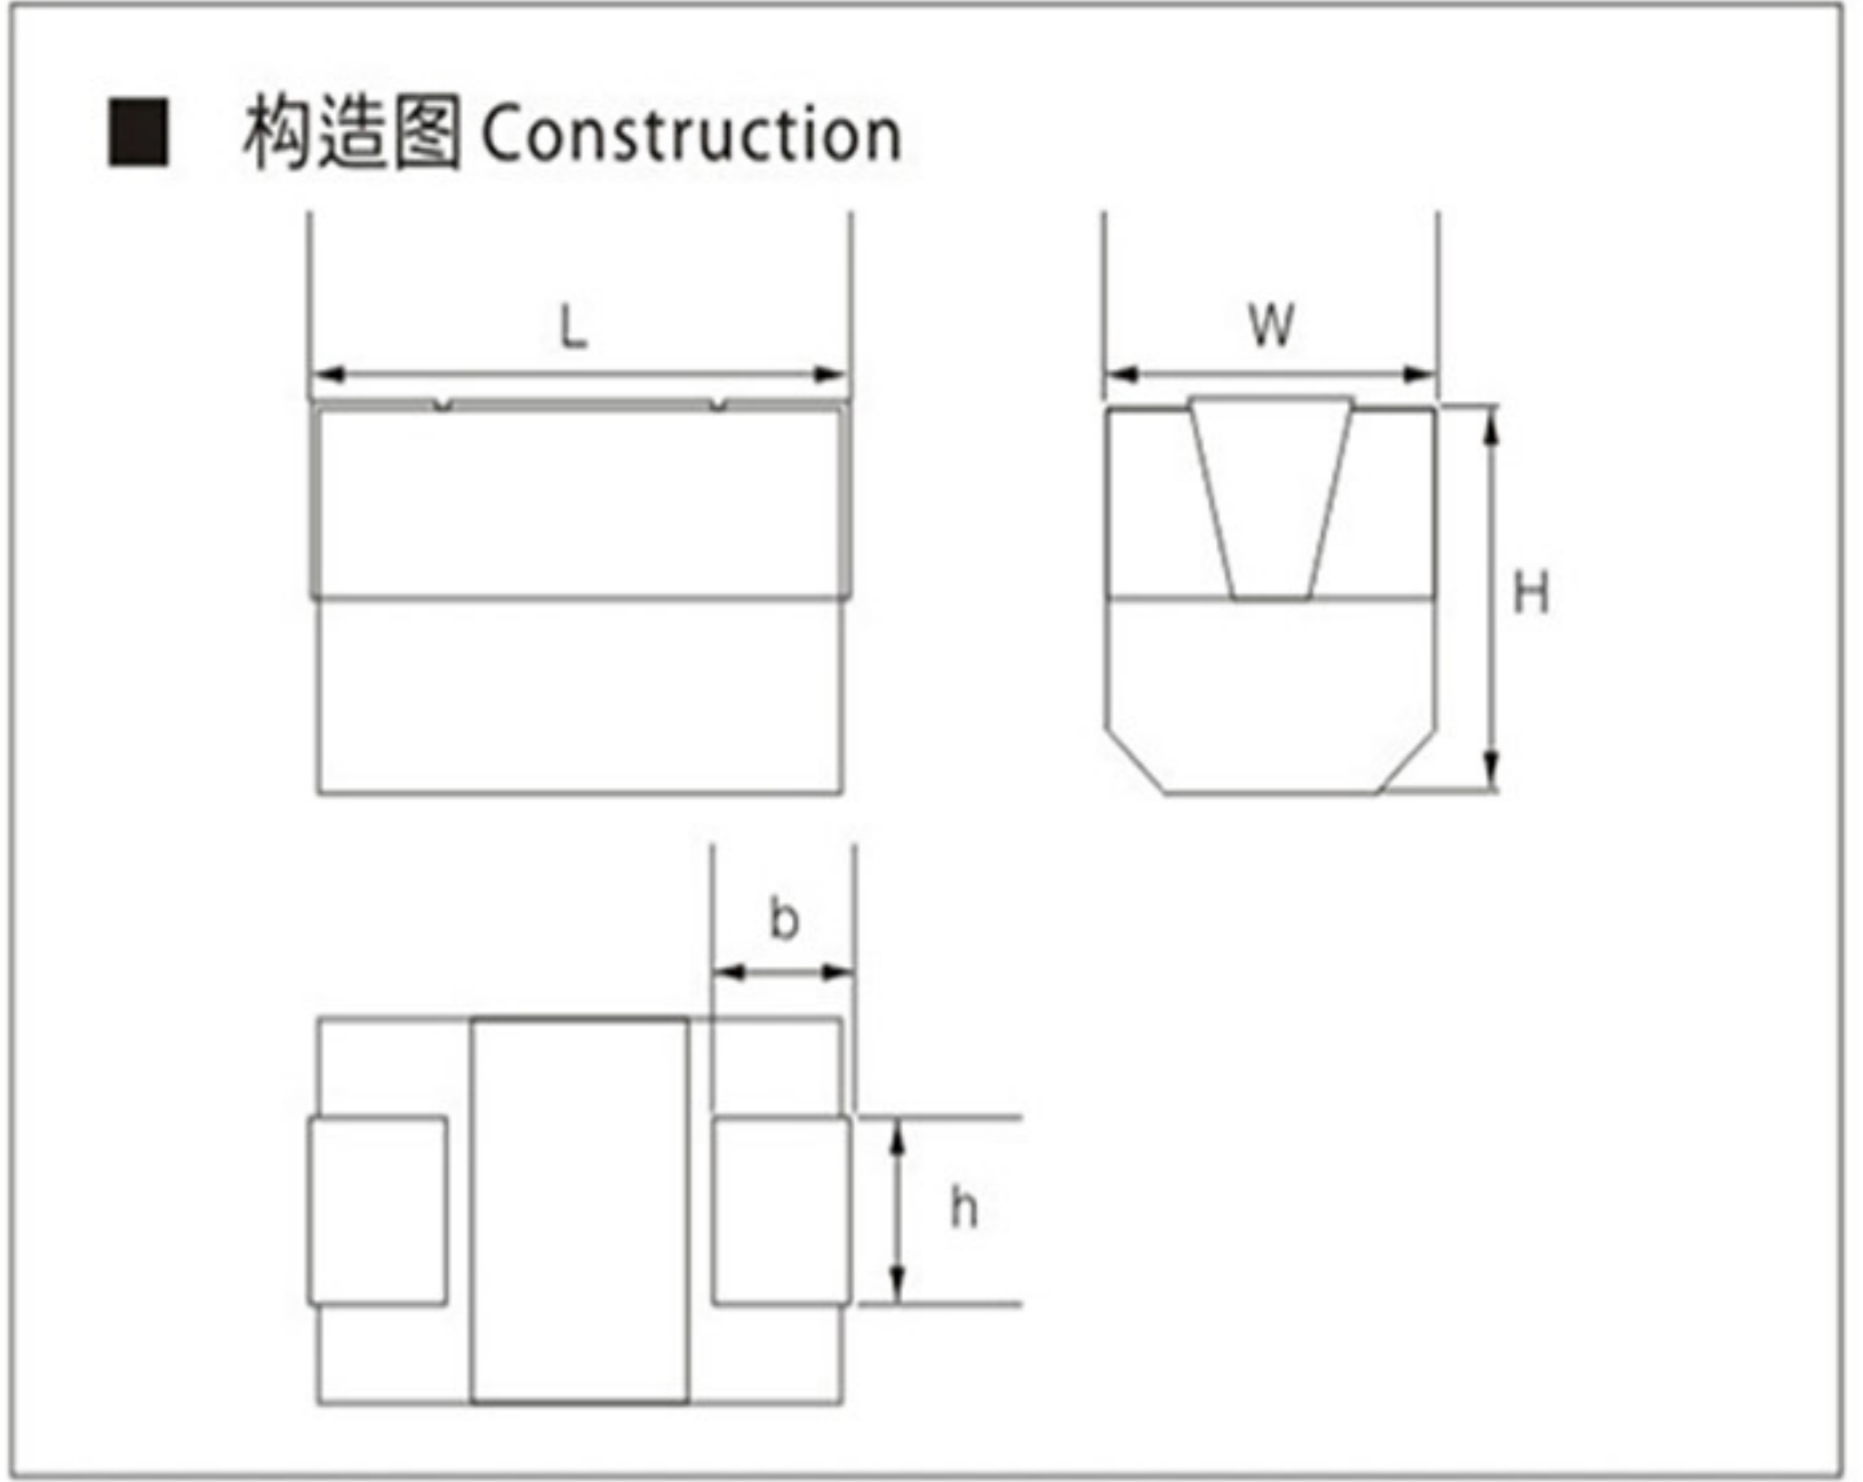

■ 特点 Characteristics

- 符合国家军用标准: GJB1929-1994
- 温度范围: -65°C ~ 175°C
- 稳定度: ±0.5% 125°C 1000h
- 塑封型
- Come up to: GJB1929-1994
- Temp Range: -65°C ~ 175°C
- Stability: ±0.5% 125°C 1000h
- Mold style


外形尺寸 DIMENSIONS (mm)

型号	L±0.2	W±0.2	H±0.2	b±0.15	h±0.15
CMP4223	5.0	2.5	2.45	1.2	1.3
CMP7228	7.75	2.9	2.7	1.2	1.4
CMP9936	10.45	3.5	3.3	1.2	1.4

● 技术说明 Technical Specifications

型号TYPE		CMP4223	CMP7228	CMP9936
在不同温度的额定功率 (W) Power Rating at tu°C	70°C	0.067	0.125	0.250
	125°C	0.050	0.100	0.125
极限电压Limiting Element Voltage(V)		200	200	250
阻值范围Resistance Range(Ω)		10~1M5	0R1~5M0	0R1~10M
精度范围 Tolerance Range		P(±0.02%), W(±0.05%), B(±0.1%), C(±0.25%), D(±0.5%), F(±1.0%)		
温度系数范围TC-Range(10 ⁻⁶ /K)		C7(±5), C6(±10), C5(±15), C4(±20), C3(±25), C2(±50)		

● 降功耗曲线 Derating Curve

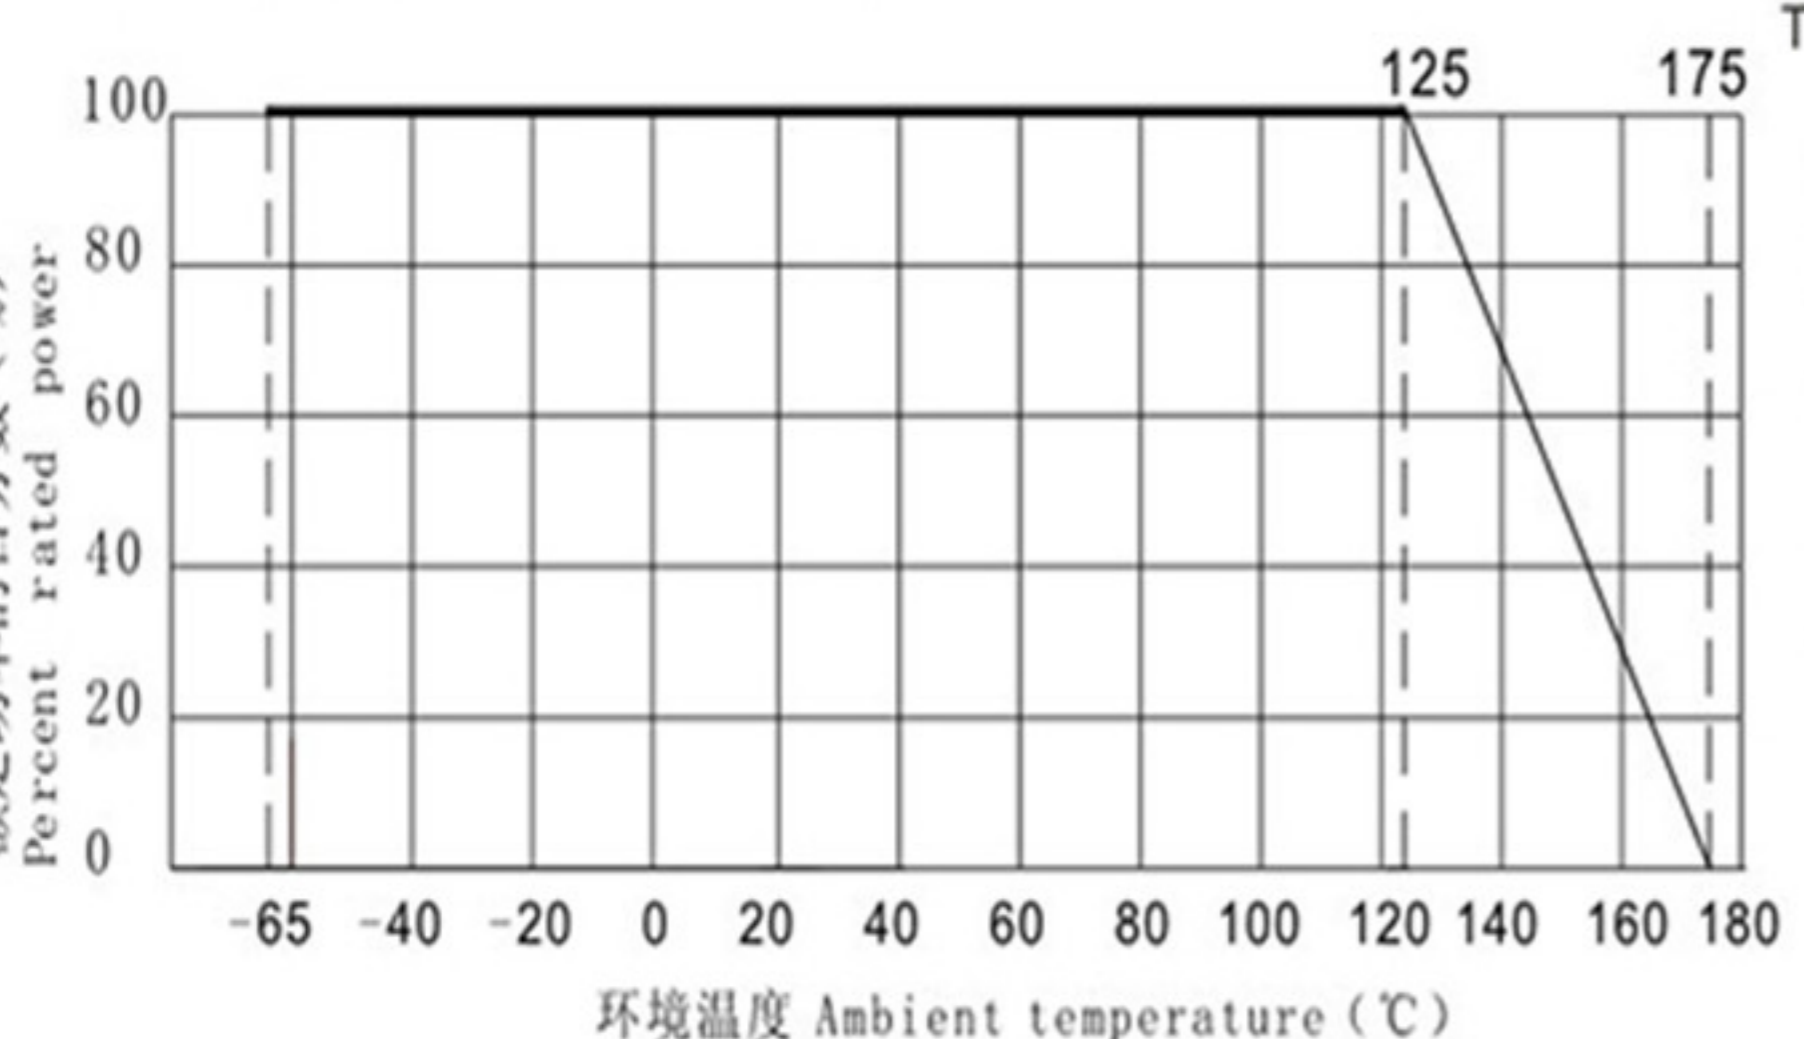

● 表面贴装电阻回流焊接曲线图

