



RX79 精密绕线电阻器

precision wire-wound resistors

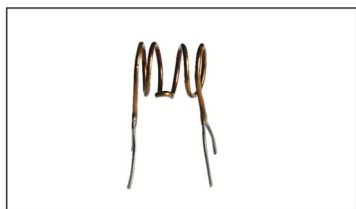

■ 构造图 Construction

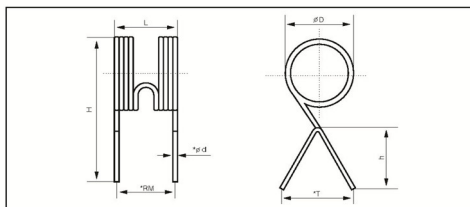

■ 产品特点 Features

- 低阻值
- 高精度
- 低温度系数
- 采用铜引出端保证了良好的焊接性
- Low resistance value
- Close accuracy
- Low temperature coefficient
- Copper terminal with perfect solderability


■ 应用范围 Applications

- 应用于仪器仪表
- Used in meters and instruments

■ 执行标准 Reference Standards

Q/ATK066

■ 降功耗曲线 Derating Curve

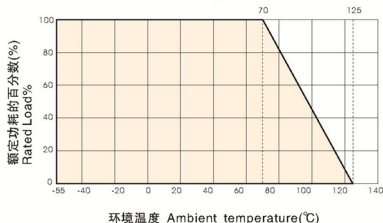

■ 外形尺寸 Dimensions

型号 Type	外形尺寸 Dimensions (mm)						
	L ± 1	RM ± 1	H ± 1	D ± 1	h ± 1	d ± 0.2	T ± 1
RX79-1	13	12	32	12.5	15	0.8	12
RX79-2	13	12	32	12.5	15	1.0	12
RX79-6	28	25	55	17	20	3.0	12.5

*尺寸可根据用户要求或阻值范围改变 *Above dimensions can be changeable if requested by customer.

■ 技术说明 Technical Specifications

型号 Type	额定功率 Rated power (w) Ambient temperature = -70°C	阻值范围 Resistance Range (Ω)		精度 Tolerance	温度系数 (ppm/°C) Temperature coefficient
		最小值 Min	最大值 Max		
RX79-1	1.0	R01	R10	± 0.1% (B) ± 0.25% (C) ± 0.5% (D) ± 1% (F)	± 10 ± 20 ± 25 ± 50
RX79-2	2.0	R01	R10		
RX79-6	6.0	R01	R10		

■ 订货示例 How To Order

例如 Example

RX79	1	1W	R05	± 0.5%	± 25ppm	盒装
产品型号 Type	类型 Style	功率 Power	标称阻值 Nominal Value	精度 Tolerance	温度系数 TCR	包装方式 Packaging
RX79	1 2 6	1W 2W 6W	R05	± 0.1% ± 0.25% ± 0.5% ± 1.0%	± 10ppm ± 20ppm ± 25ppm ± 50ppm	盒装 box