



RX70 系列 高精密线绕电阻器 Series RX70

High precision Wirewound Resistors

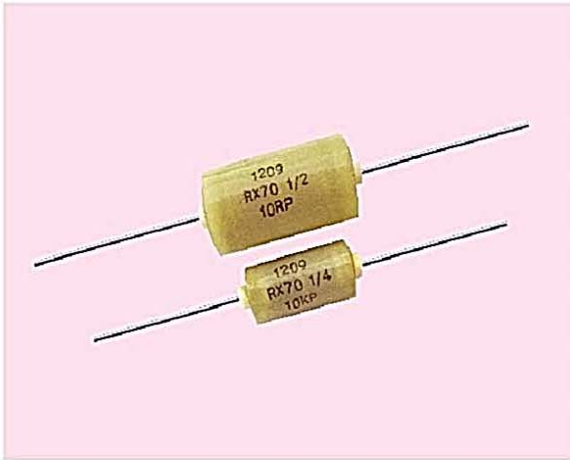

■ 构造图 Construction

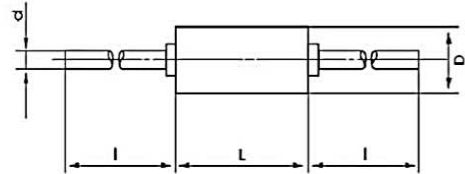

■ 特点 Characteristics

- 绝缘性、耐潮湿性能好
- Excellent properties of insulation and humidity-proof
- 高稳定性和高可靠性
- Excellent stability and reliability
- 精度高、低温漂
- High precision and low TCR

外形尺寸 DIMENSIONS (mm)				
型号	L±0.3	D±0.3	l±3	d±0.05
RX70-0.25W	15.5	8	28	0.8
RX70-0.5W	22	12		
RX70-0.75W	27	12		
RX70-1W	27.5	15		
RX70-2W	38	18		
RX70-3W	56	24		

■ 技术说明 Technical Specifications

型号TYPE	RX70-0.25W	RX70-0.5W	RX70-0.75W	RX70-1W	RX70-2W	RX70-3W
70℃时额定功率Power Rating at 70℃(W)	0.25	0.5	0.75	1	2	3
极限电压Limiting Element Voltage (V)	250	500	500	1000	1000	1000
绝缘电压Insulation Voltage(V)	350	700	700	1400	1400	1400
阻值范围Resistance Range(Ω)	1R~500K	1R~1M	1R~2M	1R~4M	1R~5M	1R~10M
精度范围Tolerance Range	L(±0.01%), P(±0.02%), W(±0.05%), B(±0.1%), C(±0.25%), D(±0.5%), F(±1.0%)					
温度系数范围(10 ⁻⁶ /K) TC-Range(10 ⁻⁶ /K)	C6(±10), C5(±15), C4(±20), C3(±25)					


RX70 系列 高精密线绕电阻器 Series RX70

High precision Wirewound Resistors




- 执行标准 Reference Standards
GB/T5729-2003、GB5734-85

- 降功耗曲线 Derating Curve

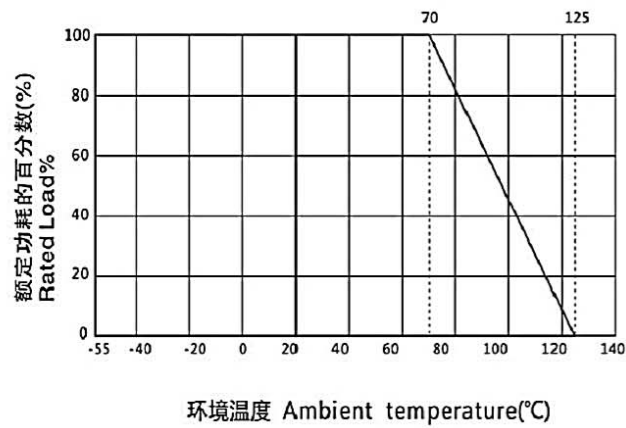

- 订货示例 (Examples for purchase)

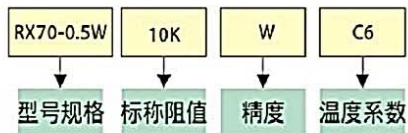

- 包装方式: 一般采用塑料自封袋包装。起订量: 10只以上。
Packaging: Bulk in plastic bags (MOQ: 10 pcs)