
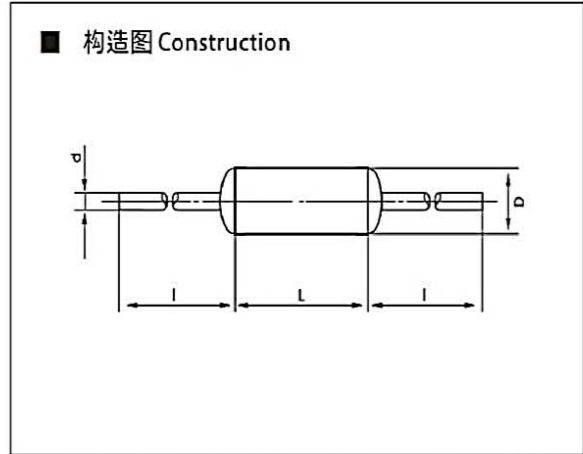


# RX71 系列 精密线绕电阻器 Series RX71

Precision Wirewound Resistors

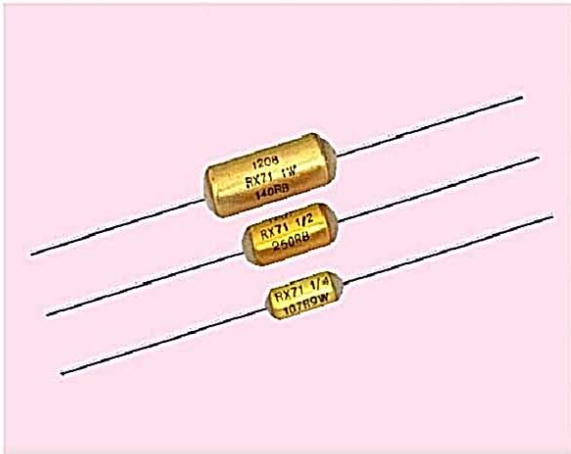

■ 特点 Characteristics

- 绝缘性、耐潮湿性能好
- 高稳定性和高可靠性
- 精度高、低温漂
- 铝外壳结构
- Excellent properties of insulation and humidity-proof
- Excellent stability and reliability
- High precision and low TCR
- Aluminium housed


外形尺寸 DIMENSIONS (mm)				
型号	L±0.3	D±0.3	l±3	d±0.05
RX71-0.25W	12	5.5	25	0.8
RX71-0.5W	15	7.5	25	0.8
RX71-1W	23	10	25	0.8

■ 技术说明 Technical Specifications


型号TYPE	RX71-0.25W	RX71-0.5W	RX71-1W
70℃时额定功率Power Rating at 70℃(W)	0.25	0.5	1
极限电压Limiting Element Voltage (V)	200	350	500
绝缘电压Insulation Voltage(V)	280	500	700
阻值范围Resistance Range(Ω)	1R~100K	1R~300k	1R~1M
精度范围Tolerance Range	W (±0.05%), B (±0.1%), C (±0.25%), D (±0.5%), E (±1.0%)		
温度系数范围TC-Range(10 <sup>-6</sup> /K)	C5(±15), C4(±20), C3(±25)		

■ 执行标准 Reference Standards  
 GB/T5729-2003、GB5734-85

■ 降功耗曲线 Derating Curve

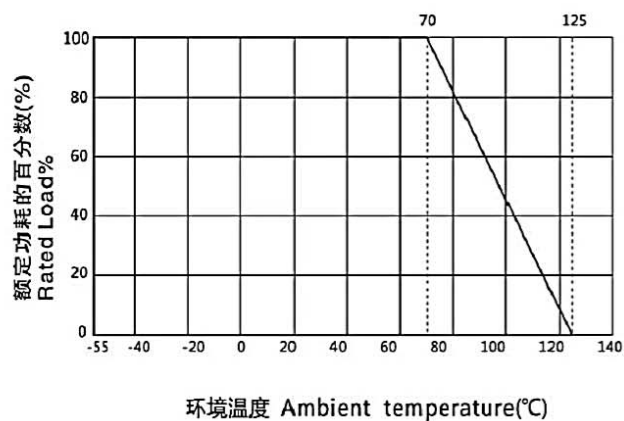

■ 订货示例 (Examples for purchase)

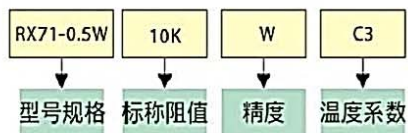

■ 包装方式:一般采用塑料自封袋包装。起订量: 10只以上。  
 Packaging: Bulk in plastic bags (MOQ: 10 pcs)