



# RX75 系列 精密线绕电阻器 Series RX75

Precision Wirewound Resistors

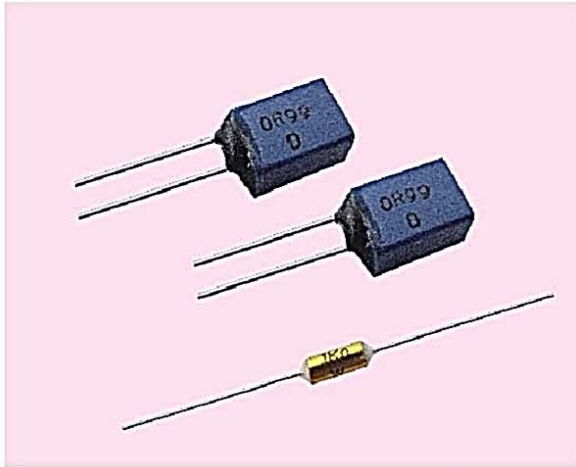

## ■ 构造图 Construction

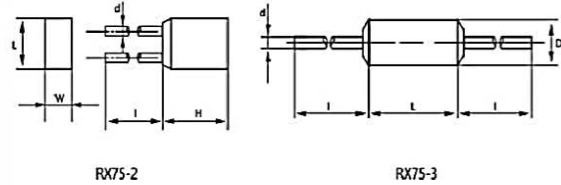

## ■ 特点 Characteristics

- 绝缘性、耐潮湿性能好
- Excellent properties of insulation and humidity-proof
- 高稳定性和高可靠性
- Excellent stability and reliability
- 精度高、低温漂
- High precision and low TCR
- 体积小
- Small size

## 外形尺寸 DIMENSIONS (mm)

型号	功率 (W)	L±0.3	W±0.3	H±0.3	l±3	d±0.05
RX75-2	0.125	8	4.5	8	13	0.6
	0.25	8	6	13		
RX75-3	0.125	L±0.3		D±0.3		l±2
		10		3.2		23

## ■ 技术说明 Technical Specifications


型号TYPE	RX75-2	RX75-2	RX75-3
70℃时额定功率Power Rating at 70℃(W)	0.125	0.25	0.125
极限电压Limiting Element Voltage (V)	75	250	75
绝缘电压Insulation Voltage(V)	100	350	100
阻值范围Resistance Range(Ω)	10R~51K	10R~200k	5.1R~47K
精度范围Tolerance Range	W(±0.05%), B(±0.1%), C(±0.25%), D(±0.5%), F(±1.0%)		
温度系数范围TC-Range(10 <sup>-6</sup> /K)	C6(±10), C5(±15), C4(±20), C3(±25)		

# RX75 系列 精密线绕电阻器 Series RX75 Precision Wirewound Resistors




■ 执行标准 Reference Standards  
GB/T5729-2003、GB5734-85

■ 降功耗曲线 Derating Curve

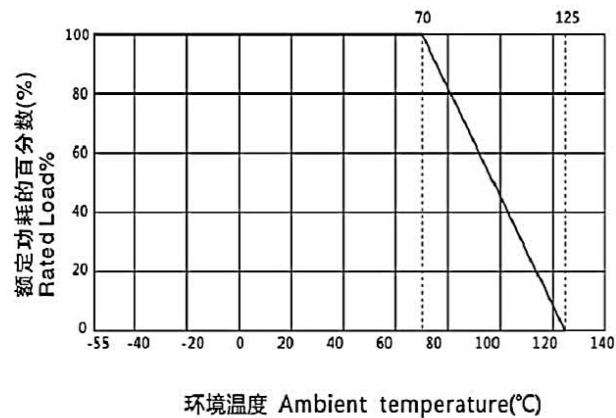

■ 订货示例 (Examples for purchase)

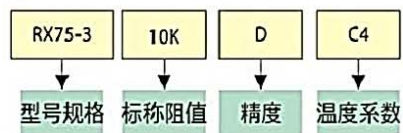

■ 包装方式:一般采用塑料自封袋包装。起订量: 10只以上。  
Packaging: Bulk in plastic bags (MOQ: 10 pcs)