


RX10 低阻值精密绕线电阻器

low value precision wire-wound resistors

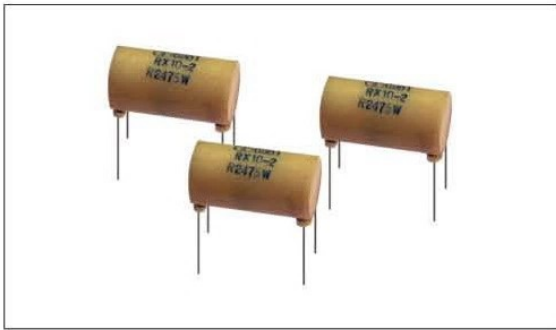


产品特点 Features

- 低阻值, 低温度系数, 高精度
- 绝缘、耐湿性能好
- Low resistance value, low TCR, high precision
- Excellent properties of insulation and humidity-proof

应用范围 Applications

- 应用于仪器仪表
- 其他电子设备
- Used in meters and instruments
- Other electrical equipments

降功耗曲线 Derating Curve

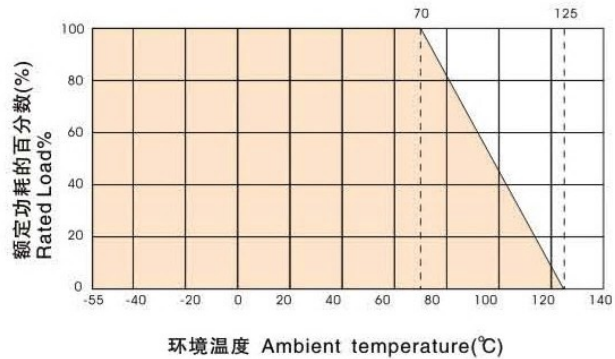

执行标准 Reference Standards

GB/T5729-2003
GB5734-85

技术说明 Technical Specifications

型号 Type	功率 Power (W)	阻值范围 Resistance Range (Ω)	允许偏差 Tolerance (%)	温度系数 T.C.R (10 ⁻⁶ /K)	尺寸 Size (mm)				元件极限电压 (直流或交流有效值) Limiting Voltage (DC or AC R.M.S)	绝缘电压 (直流或交流峰值) Insulation Voltage (DC or AC Peak)
					电阻体 Body		引线 Terminal			
					Dmax ±0.3	Lmax ±0.3	d	l		
RX10	0.5	0.01~1.0	±0.05(W) ±0.1(B) ±0.25(C) ±0.5(D) ±1(F)	±10	12	25	0.8	25 ± 3	500	700
	1	0.01~1.0		±20	15	27.5			1000	1400
	2	0.01~1.0		±25	18	38				

订货示例 How To Order

例如 Example

RX10	0.5W	1Ω	±0.05%	±25(10 ⁻⁶ /K)	盒装
产品型号 Type	功率 Power	标称阻值 Nominal Value	精度 Tolerance	温度系数 TCR	包装方式 Packaging
RX10	0.5W 1W 2W	1Ω	±0.05% ±0.1% ±0.2% ±0.5% ±1.0%	±25(10 ⁻⁶ /K)	盒装 box