
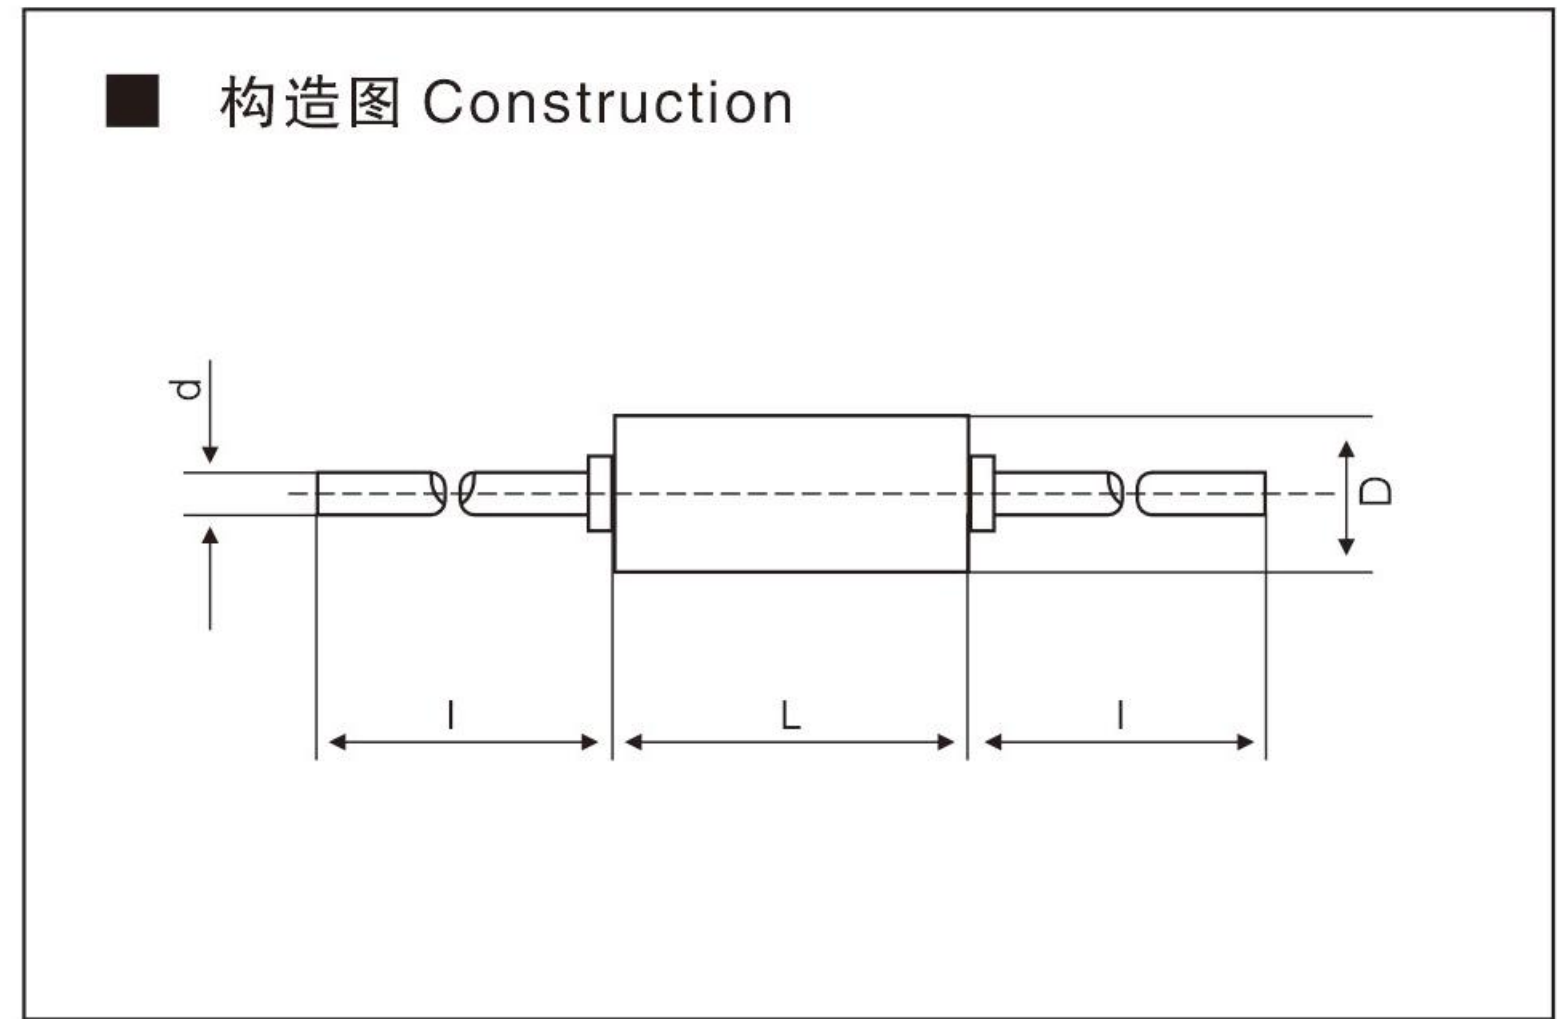


RX70 系列

高精密线绕电阻器

Series RX70

High precision Wirewound Resistors

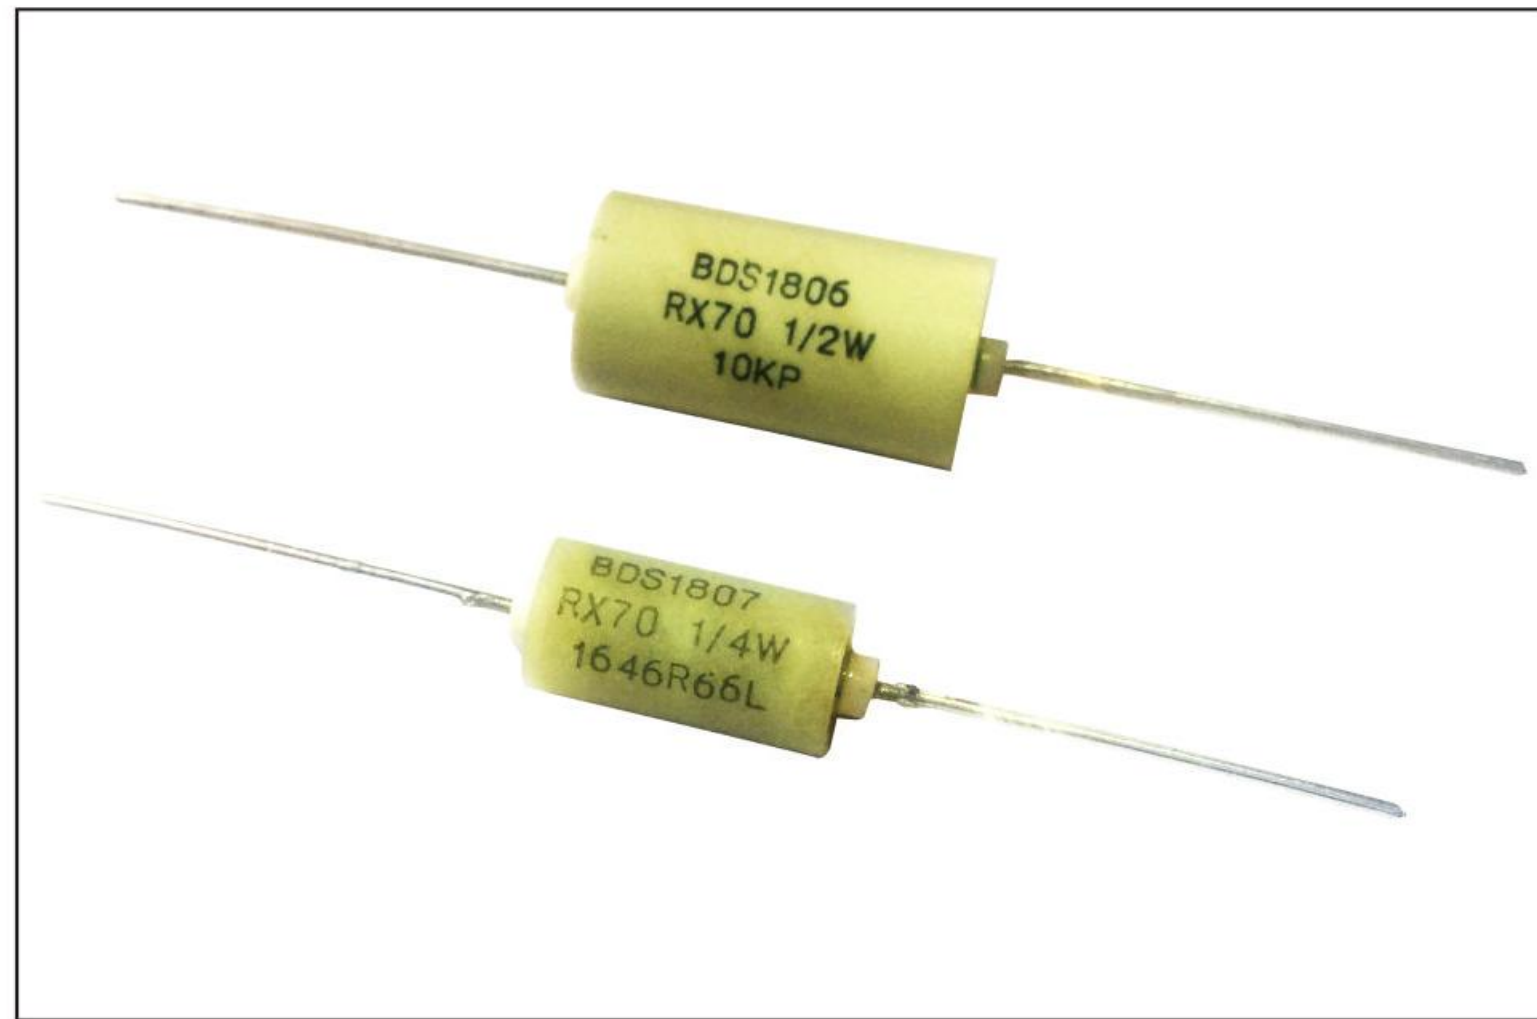

■ 特点 Characteristics

- 绝缘性、耐潮湿性能好
- Excellent Properties of Insulation and Humidity-proof
- 高稳定性和高可靠性
- Excellent Stability and Reliability
- 精度高、低温漂
- High Precision and Low TCR

外形尺寸DIMENSIONS (mm)				
型号	L ± 0.5	D ± 0.5	l ± 3	d ± 0.05
RX70-0.25W	15.5	8	28	0.8
RX70-0.5W	22	12		
RX70-0.75W	27	12		
RX70-1W	27.5	15		
RX70-2W	38	18		
RX70-3W	56	24		

■ 技术说明 Technical Specifications

型号Type	RX70-0.25W	RX70-0.5W	RX70-0.75W	RX70-1W	RX70-2W	RX70-3W
70°C时额定功率Rated Power at 70°C(W)	0.25	0.5	0.75	1	2	3
最大工作电压Max Working Voltage(V)	250	500	500	1000	1000	1000
绝缘电压Insulation Voltage(V)	350	700	700	1400	1400	1400
阻值范围Resistance Range(Ω)	1R ~ 250K	1R ~ 500K	1R ~ 1M	1R ~ 2M	1R ~ 2M	1R ~ 2M
精度范围Tolerance Range	L (± 0.01%), P (± 0.02%), W (± 0.05%), B (± 0.1%), C (± 0.25%), D (± 0.5%), F (± 1.0%)					
温度系数范围 (10 ⁻⁶ /K) TC-Range(10 ⁻⁶ /K)	C6 (± 10), C5 (± 15), C4 (± 20), C3 (± 25)					

RX70 系列 高精密线绕电阻器 Series RX70


High precision Wirewound Resistors




■ 执行标准 Reference Standards

GB/T5729-2003、GB5734-85

■ 降功耗曲线 Derating Curve

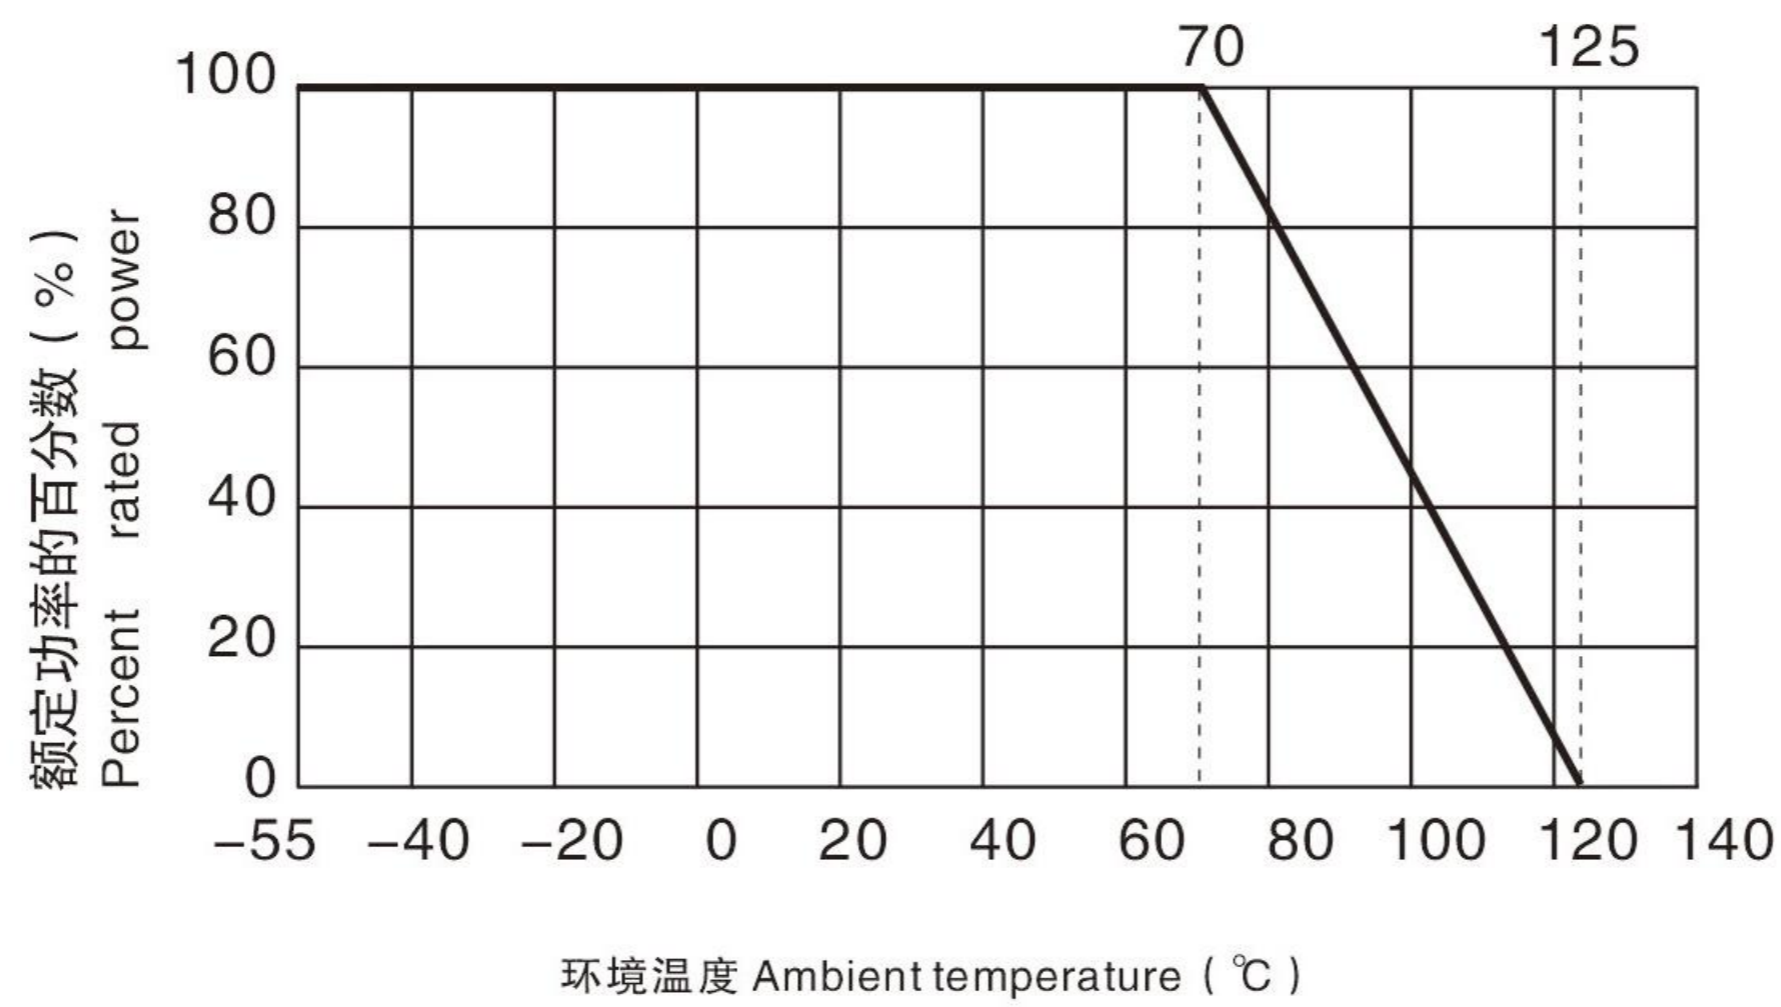

■ 订货示例 (Examples for purchase)

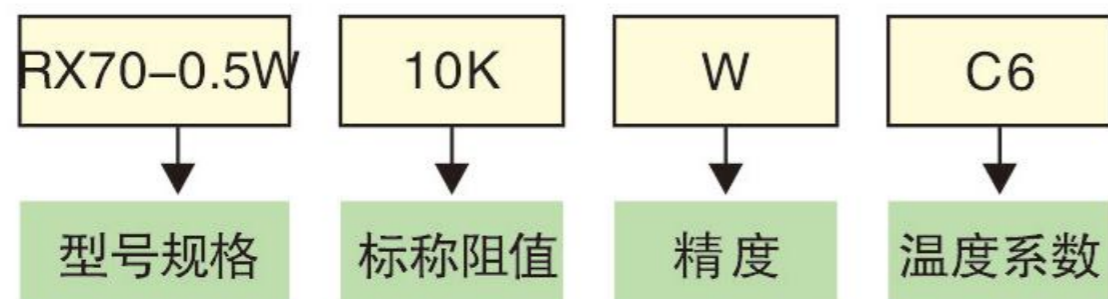

■ 包装方式 Packaging

一般采用塑料自封袋包装。起订量：10只以上。

Packaging: Bulk in plastic bags (MOQ: 10 pcs).