



RX75 系列
精密线绕电阻器
Series RX75
Precision Wirewound Resistors

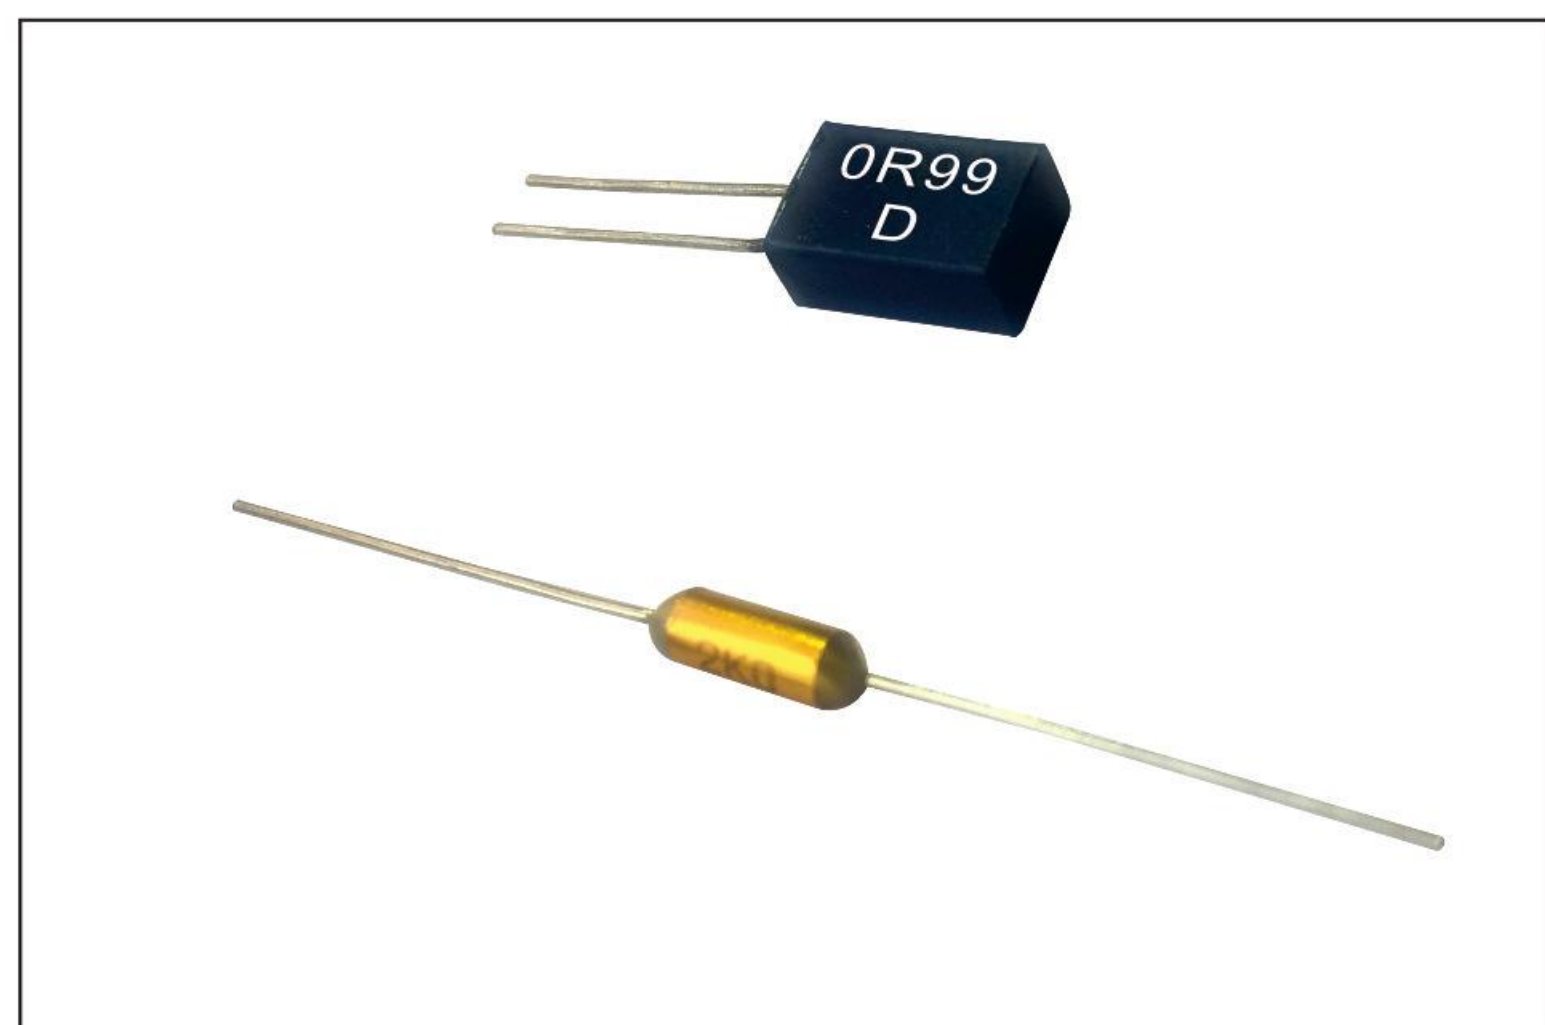

构造图 Construction

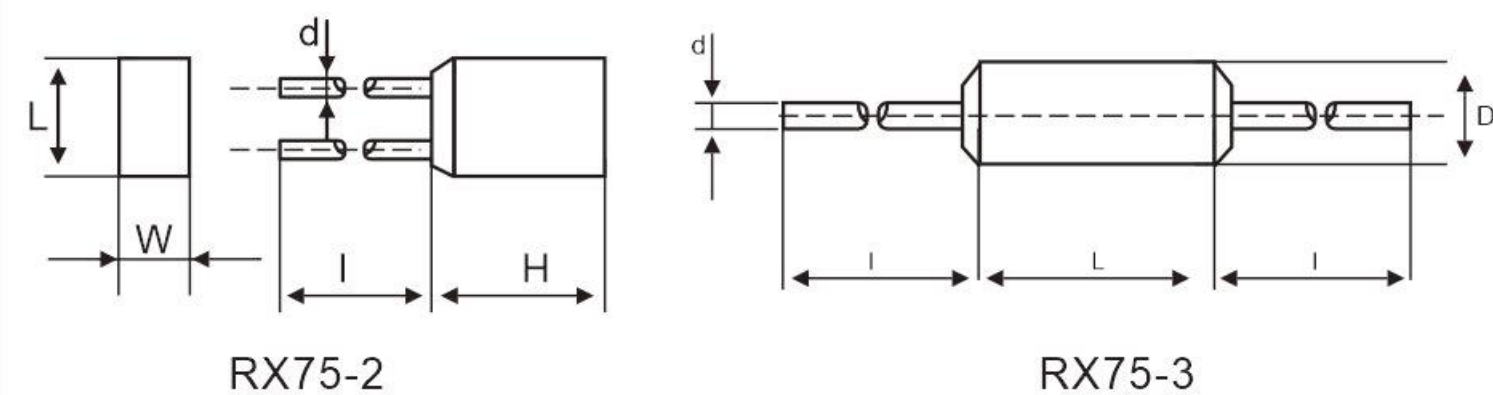

特点 Characteristics

- 绝缘性、耐潮湿性能好
- 高稳定性和高可靠性
- 精度高、低温漂
- 体积小
- Excellent Properties of Insulation and Humidity-proof
- Excellent Stability and Reliability
- High Precision and Low TCR
- Small Size

外形尺寸DIMENSIONS (mm)							
型号	功率 (W)	L ^{+0.6} _{-0.1}	W ^{+0.5} _{-0.1}	H ± 0.5	l ± 3	d ± 0.05	
RX75-2	0.125	7.0	3.6	6.0	15	0.6	
	0.25	7.25	4.7	12			
RX75-3	0.125	L ± 0.3		D ± 0.3		l ± 2	d ± 0.05
		7.5		3.2		23	0.6

技术说明 Technical Specifications


型号Type	RX75-2	RX75-2	RX75-3
70℃时额定功率Rated Power at 70℃(W)	0.125	0.25	0.125
最大工作电压Max Working Voltage(V)	50	158	35
绝缘电压Insulation Voltage(V)	100	350	100
阻值范围Resistance Range(Ω)	10R ~ 20K	10R ~ 100K	5.1R ~ 10K
精度范围Tolerance Range	W (± 0.05%),B (± 0.1%),C (± 0.25%),D (± 0.5%),F (± 1.0%)		
温度系数范围 (10 ⁻⁶ /K) TC-Range(10 ⁻⁶ /K)	C6(± 10),C5(± 15),C4(± 20),C3(± 25)		

RX75 系列
精密线绕电阻器
Series RX75
Precision Wirewound Resistors




■ 执行标准 Reference Standards
GB/T5729-2003、GB5734-85

■ 降功耗曲线 Derating Curve

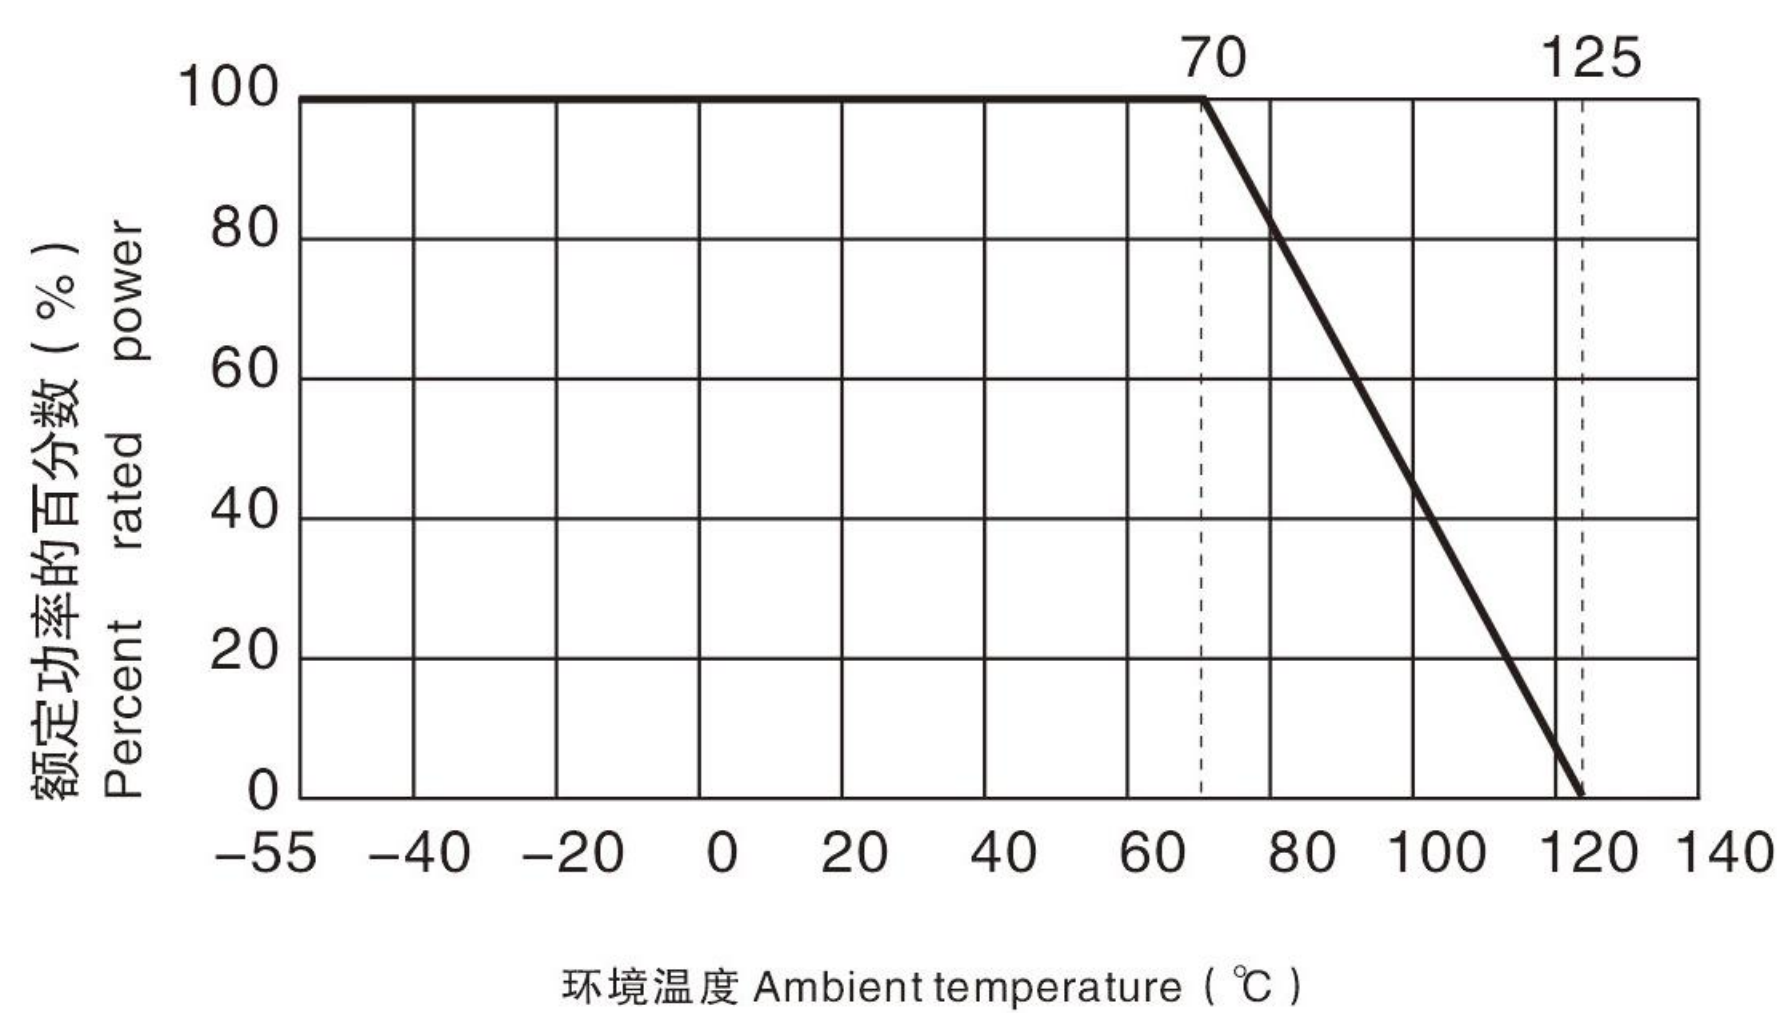

■ 订货示例 (Examples for purchase)

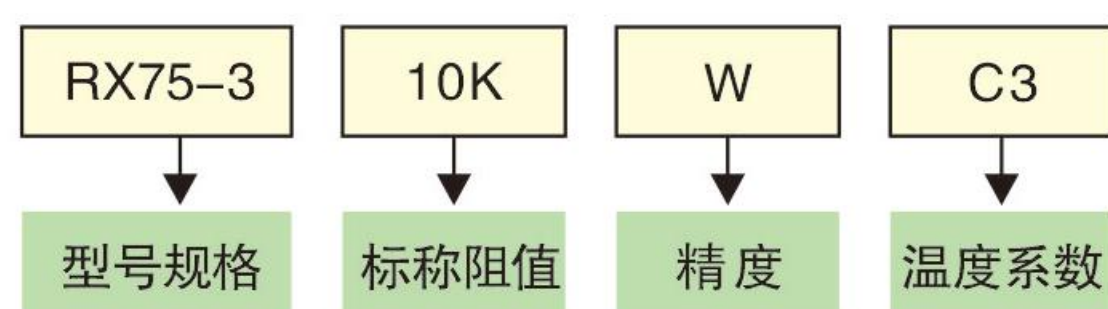

■ 包装方式 Packaging
一般采用塑料自封袋包装。起订量：10只以上。
Packaging: Bulk in plastic bags (MOQ: 10 pcs).