



RX710 系列 高精密线绕电阻器 Series RX710

High precision Wirewound Resistors

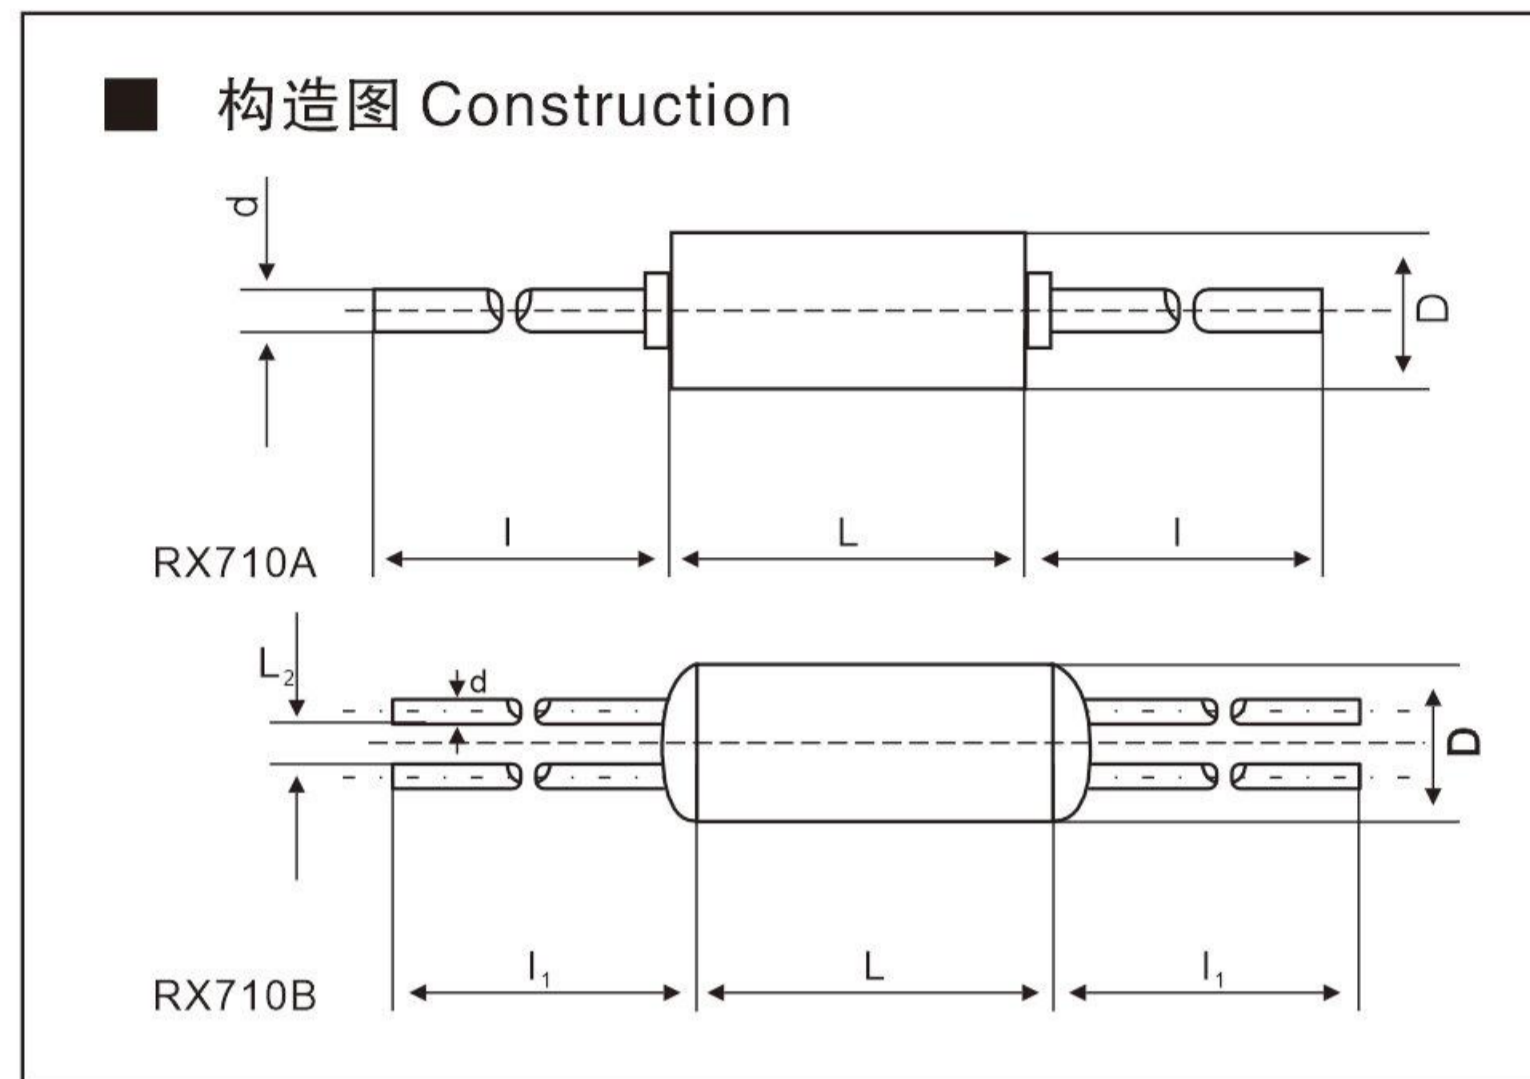

RX710系列 高精密线绕电阻器 High precision Wirewound Resistors

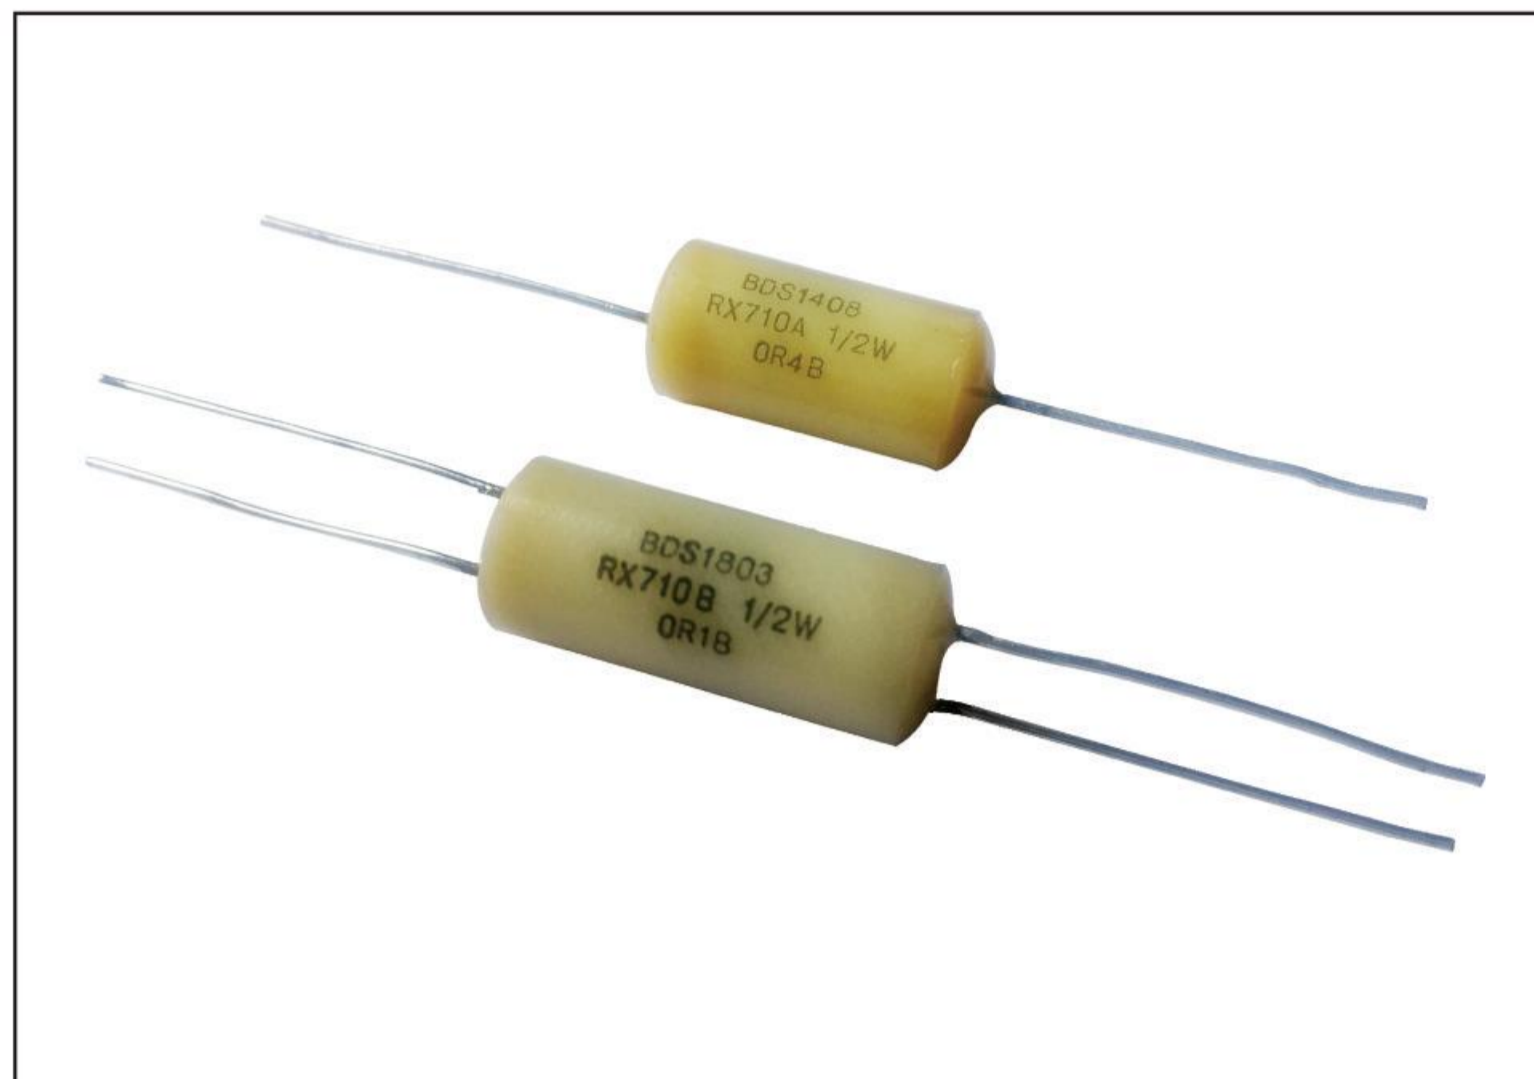

■ 特点 Characteristics

- 绝缘性、耐潮湿性能好
- Excellent Properties of Insulation and Humidity-proof
- 高稳定性和高可靠性
- Excellent Stability and Reliability
- 大电流、精度高、低温漂
- High current, High Precision and Low TCR

外形尺寸DIMENSIONS (mm)						
型号	功率 (W)	L ± 0.5	D ± 0.5	l ₂ ± 0.5	l ₁ ± 3	d ± 0.05
RX710-A	0.5	23	11.5	/	28	0.8
	0.75	27.5	12	/		
	1	27.5	14.5	/		
	2	37.5	17.5	/		
RX710-B	0.5	27.5	12	5	28	0.8
	0.75	27.5	12	5		
	1	27.5	15	7		
	2	37.5	17.5	9		

■ 技术说明 Technical Specifications

型号TYPE	RX710-A-0.5W RX710-B-0.5W	RX710-A-0.75W RX710-B-0.75W	RX710-A-1W RX710-B-1W	RX710-A-2W RX710-B-2W
70°C时额定功率Rated Power at 70°C(W)	0.5	0.75	1	2
最大工作电压Max Working Voltage(V)	2.2	2.7	3.2	4.5
绝缘电压Insulation Voltage(V)	700	700	1400	1400
阻值范围Resistance Range(Ω)	0.01 ~ 10R	0.01 ~ 10R	0.01 ~ 10R	0.01 ~ 10R
精度范围Tolerance Range	L (± 0.01%), P (± 0.02%), W (± 0.05%), B (± 0.1%), C (± 0.25%), D (± 0.5%), F (± 1.0%)			
温度系数范围 (10 ⁻⁶ /K) TC-Range(10 ⁻⁶ /K)	C6 (± 10), C5 (± 15), C4 (± 20), C3 (± 25), C2 (± 50)			

RX710 系列 高精密线绕电阻器 Series RX710


High precision Wirewound Resistors




■ 执行标准 Reference Standards

GB/T5729-2003、GB5734-85

■ 降功耗曲线 Derating Curve

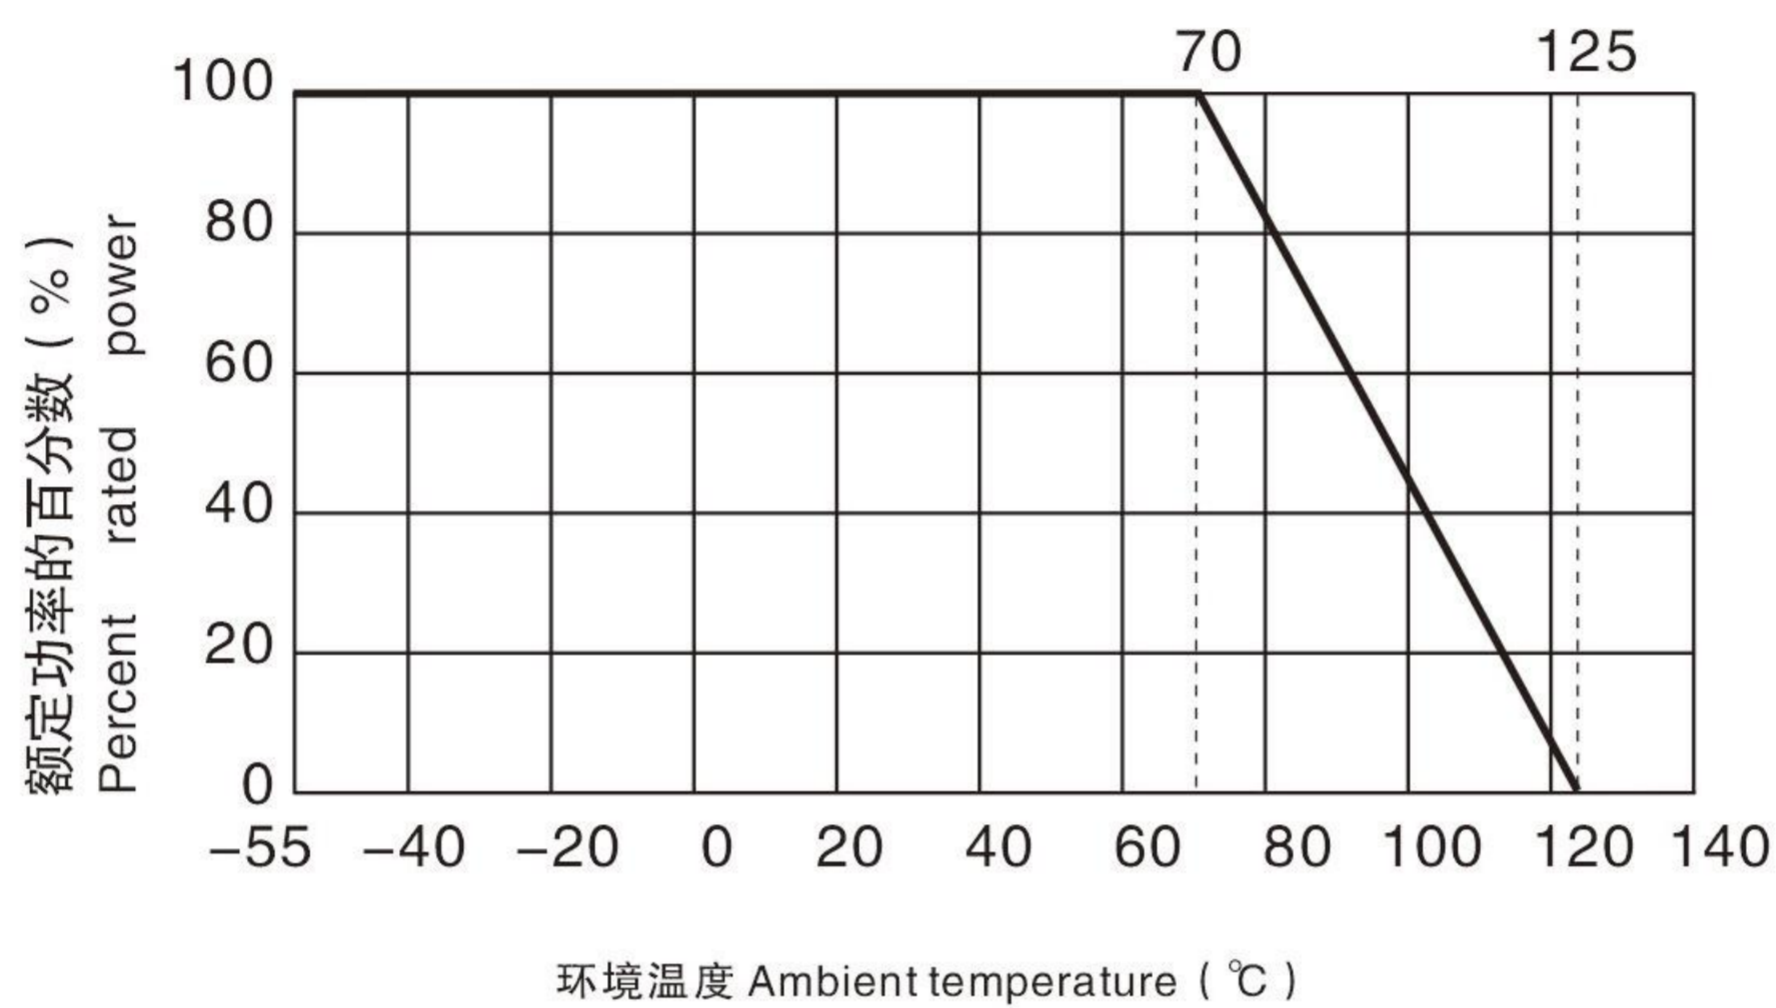

■ 订货示例 (Examples for purchase)

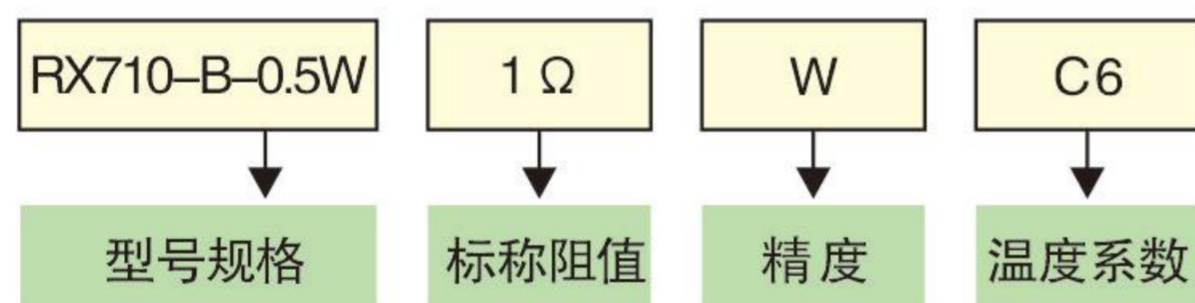

■ 包装方式 Packaging

一般采用塑料自封袋包装。起订量：10只以上。
Packaging: Bulk in plastic bags (MOQ: 10 pcs).